Development and Validation of a Flight-Identified Full-Envelope Business Jet Simulation Model Using a Stitching Architecture

Tom Berger and Mark B. Tischler[y]
U.S. Army Aviation Development Directorate, Moffett Field, CA

Steven G. Hagerott[z]
Textron Aviation, Wichita, KS

M. Christopher Cotting[x], William R. Gray[{], Capt James L. Gresham[k], Capt Justin E. George, Capt Kyle J. Krogh, 1st Lt Alessandro D'Argenio[k], and Capt Justin D. Howland[k]
USAF Test Pilot School, Edwards AFB, CA

A full flight-envelope simulation model of the Calspan Variable Stability Learjet-25 was developed from flight data. The model is based on a stitched model architecture, which falls into the class of quasi-Linear-Parameter-Varying models, and was developed using a series of discrete linear point models and trim data. Point models were identified from flight data at five different flight and loading conditions. A scaling method was used and validated to convert all identified point models to the same loading configuration. The quasi-linear aerodynamics from the models were then combined with trim data and the full nonlinear equations of motion to develop the stitched model. Through validation with flight data, the model was shown to accurately represent the aircraft dynamics within the normal flight envelope and be able to estimate the effects of weight and center of gravity variations. The paper provides a brief background of model stitching, lists the steps required to develop a stitched model from flight data, and then demonstrates how the steps are applied to the Learjet.

Nomenclature

0	Subscript denoting trim condition
	Angle of attack [rad or deg]

ω Frequency [rad/sec]
θ and ϕ Roll and pitch attitudes [rad or deg]
ρ Vector of scheduling parameters
$\boldsymbol{A}$, $\boldsymbol{B}$, $\boldsymbol{C}$, $\boldsymbol{D}$ State-space matrices
$\boldsymbol{W}$ Vector of states that are not scheduling parameters
$\boldsymbol{X}$, $\boldsymbol{U}$, $\boldsymbol{Y}$ Vectors of states, inputs, and outputs
$\boldsymbol{Z}$ Vector of states that are scheduling parameters
τ Time delay [sec]
a Acceleration [ft/sec^2]
c Mean aerodynamic chord
F Stick force [lbs]
J Frequency response ωt cost
J_{RMS} Time domain RMS error cost
L Lift
L, M, N Roll, pitch, and yaw moment derivatives
n Load factor [g]
p, q, r Perturbation roll, pitch, and yaw rates [rad/sec or deg/sec]
t Time [sec]
U, V, W Total x-, y-, and z-body axis velocity [ft/sec]
u, v, w Perturbation x-, y-, and z-body axis ve(elo)-27.995(cit)27.9983.999(8 /T1_0 9. 9.963 Tf -43.865 -11.955 Td 9.9r911.95

were each own at a unique loading con guration [weight, center of gravity (CG), and inertia] were scaled to a common loading con guration. This was especially important for the Learjet, since the aircraft has large fuel tanks on the tips of its wings which signi cantly change its roll and yaw moments of inertia, and hence the lateral/directional dynamics. Finally, the models and trim data were \stitched"[2] together into the full ight-envelope model. This stitching technique refers to combining together individual linear models and trim data for discrete ight conditions with the full nonlinear equations of motion to produce a continuous, full ght-envelope simulation model. This type of model is in the class of quasi-linear-parameter-varying (qLPV) models,[7] which is discussed in more detail in Section II.

A brief description of model stitching is presented in Section II. Section III provides a description of the aircraft and ight test. Then, identi cation results of one individual point model will be presented in Section IV, followed by a method to baseline a point model from one loading con guration to another in Section V. Section VI described a method to repurpose longitudinal speed stability data to trim data for use in the stitched model. Finally, the results of the stitched model will be presented in Section VII, including comparison with validation ight data in Section VIII .

II. Model Stitching Overview

A continuous, full-envelope simulation model of the LJ-25 was developed to represent the aircraft dynamics accurately over its entire ight and loading envelopes. This was accomplished using the model stitching technique,[2,3] which refers to the process of combining a collection of linear state-space models at various ght conditions with trim data into a full-envelope simulation model. At its core, the stitched model is comprised of a quasi-linear-parameter-varying model (qLPV), with distinctive features speci c to aircraft and rotorcraft applications. This section will provide some background on qLPV models and detail how the stitched model is an extension of the qLPV framework with aircraft-speci c features.

A. Quasi-Linear-Parameter-Varying Model

Linear-parameter-varying (LPV) models or systems are, in general, representations of nonlinear systems:

$$\dot{\boldsymbol{X}}(t) = f\left(\boldsymbol{X}(t);\boldsymbol{U}(t)\right) \tag{1}$$

$$\boldsymbol{Y}(t) = h\left(\boldsymbol{X}(t);\boldsymbol{U}(t)\right) \tag{2}$$

where:

> $\boldsymbol{X}$, $\boldsymbol{U}$, and $\boldsymbol{Y}$ are the total states, inputs, and outputs of the system, respectively, and f and h are nonlinear functions.

A LPV model is a linearized state-space representation of the nonlinear system in Equations 1 and 2, but di ers from a typical Linear Time Invariant (LTI) system in that its state-space entries are conel95(nd)]TJ /T1_5 9.963

Note that the number of point models and trim data points do no have to be equal. In fact, it will be shown that it is desirable to have trim data at a ner grid of scheduling parameters values than point models.

If the scheduling parameter vector contains any states of the system (elements of $\boldsymbol{X}$ in Equation 3), then the system is quasi-LPV (qLPV), and is said to be \stitched"[1] in those states. As such, a qLPV system is *stitched* in elements of that are states of the system and *scheduled* in elements of that are not states of the system.

For a qLPV model then, the state vector $\boldsymbol{X}$ can be separated into states that are stitching parameters ($\boldsymbol{Z}$) and states that are not ($\boldsymbol{W}$ 6):

$$\boldsymbol{X} = \begin{bmatrix} \boldsymbol{Z} & \boldsymbol{W} \end{bmatrix}^T \tag{5}$$

Then, Equation 3 can be rewritten as (dropping the notation for the dependence on time for brevity):

$$\begin{bmatrix} \boldsymbol{Z} \\ \boldsymbol{W} \end{bmatrix} = \begin{bmatrix} \boldsymbol{A}_{11}(\ ) & \boldsymbol{A}_{12}(\ ) \\ \boldsymbol{A}_{21}(\ ) & \boldsymbol{A}_{22}(\ ) \end{bmatrix} \begin{bmatrix} \boldsymbol{Z} \\ \boldsymbol{W} \end{bmatrix} + \begin{bmatrix} \boldsymbol{Z}_0(\ ) \\ \boldsymbol{W}_0(\ ) \end{bmatrix} + \begin{bmatrix} \boldsymbol{B}_1(\ ) \\ \boldsymbol{B}_2(\ ) \end{bmatrix} \begin{bmatrix} \boldsymbol{U} & \boldsymbol{U}_0(\ ) \end{bmatrix} \tag{6}$$

Since $\boldsymbol{Z}$ is a stitching parameter, $\boldsymbol{Z}_0(\ ) = \boldsymbol{Z}$ at all times, and Equation 6 becomes:

$$\begin{bmatrix} \boldsymbol{Z} \\ \boldsymbol{W} \end{bmatrix} = \begin{bmatrix} \boldsymbol{A}_{11}(\ ) & \boldsymbol{A}_{12}(\ ) \\ \boldsymbol{A}_{21}(\ ) & \boldsymbol{A}_{22}(\ ) \end{bmatrix} \begin{bmatrix} \boldsymbol{Z} \\ \boldsymbol{W} \end{bmatrix} + \begin{bmatrix} 0 \\ \boldsymbol{W}_0(\ ) \end{bmatrix} + \begin{bmatrix} \boldsymbol{B}_1(\ ) \\ \boldsymbol{B}_2(\ ) \end{bmatrix} \begin{bmatrix} \boldsymbol{U} & \boldsymbol{U}_0(\ ) \end{bmatrix} \tag{7}$$

The contributions of $\boldsymbol{A}_{11}$ and $\boldsymbol{A}_{21}$ to $\boldsymbol{Z}$ appear to be eliminated from the qLPV model of Equation 7. However, these contributions can be shown to be preserved implicitly through the trim state and input gradients. Starting with the de nition of $\boldsymbol{A}_{11}$ as the gradient of $\boldsymbol{Z}$ with respect to $\boldsymbol{Z}$ about some trim point $_0$:

$$\boldsymbol{A}_{11} = \frac{@\boldsymbol{Z}}{@\boldsymbol{Z}}_0 \tag{8}$$

Next, taking the partial derivative of $\boldsymbol{Z}$ from Equation 7 with respect to $\boldsymbol{Z}$ results in:

$$\begin{aligned} \frac{@\boldsymbol{Z}}{@\boldsymbol{Z}}_0 = {} & \frac{@\boldsymbol{A}_{12}(\ )}{@\boldsymbol{Z}}_0 [\boldsymbol{W}j_{\ 0} \quad \boldsymbol{W}_0(\ _0)] + \boldsymbol{A}_{12}(\ _0) \begin{bmatrix} @\boldsymbol{W}/@\boldsymbol{Z}_0 & @\boldsymbol{W}_0(\ )/@\boldsymbol{Z}_0 \end{bmatrix} \\ & + \frac{@\boldsymbol{B}_1(\ )}{@\boldsymbol{Z}}_0 [\boldsymbol{U}j_{\ 0} \quad \boldsymbol{U}_0(\ _0)] + \boldsymbol{B}_1(\ _0) \begin{bmatrix} @\boldsymbol{U}/@\boldsymbol{Z}_0 & @\boldsymbol{U}_0(\ )/@\boldsymbol{Z}_0 \end{bmatrix}_0 \end{aligned} \tag{9}$$

Several terms can be canceled out from Equation 9. First, since $_0$ is a trim condition, $\boldsymbol{W}j_{\ 0} = \boldsymbol{W}_0(\ _0)$ and $\boldsymbol{U}j_{\ 0} = \boldsymbol{U}_0(\ _0)$. Furthermore, $\boldsymbol{W}$ and $\boldsymbol{U}$ are independent of $\boldsymbol{Z}$, so $@\boldsymbol{W}=@\boldsymbol{Z} = @\boldsymbol{U}=@\boldsymbol{Z} = 0$. Combining Equations 8 and 9 allows us to calculate an e ective qLPV $\boldsymbol{A}_{11}$:

$$\boldsymbol{A}_{11_{qLPV}} = \boldsymbol{A}_{12}(\ _0) \begin{bmatrix} @\boldsymbol{W}_0(=), \text{ so} \end{bmatrix}$$

B. Stitched Model

The stitched model applies qLPV modeling specifically to aircraft and rotorcraft with several main distinctions or features relevant to these applications:

1) The first distinction is that the primary scheduling parameter in the stitched model is the total instantaneous x-body axis velocity state U (note the lack of bold, differentiating U, the x-body axis velocity state from $\boldsymbol{U}$, the vector of inputs). The total instantaneous x-body axis velocity state U can be considered to be the true airspeed for typical angle of attack ranges. The stitched model, therefore, is a qLPV model that is stitched in U. For aircraft applications then, Equation 10 above reduces to:

$$X_{u_{qLPV}} = X_w(U_0)\frac{\partial W}{\partial U}_{U_0} + g\cos\theta_0\frac{\partial}{\partial U}_{U_0} X_{\delta_e}(U_0)\frac{\partial \delta_e}{\partial U}_{U_0} X_{\delta_T}(U_0)\frac{\partial \delta_T}{\partial U}_{U_0} \quad (12)$$

$$Z_{u_{qLPV}} = Z_w(U_0)\frac{\partial W}{\partial U}_{U_0} + g\sin\theta_0\frac{\partial}{\partial U}_{U_0} Z_{\delta_e}(U_0)\frac{\partial \delta_e}{\partial U}_{U_0} Z_{\delta_T}(U_0)\frac{\partial \delta_T}{\partial U}_{U_0} \quad (13)$$

$$M_{u_{qLPV}} = M_w(U_0)\frac{\partial W}{\partial U}_{U_0} M_{\delta_e}(U_0)\frac{\partial \delta_e}{\partial U}_{U_0} M_{\delta_T}(U_0)\frac{\partial \delta_T}{\partial U}_{U_0} \quad (14)$$

Again, this shows the importance of having a fine grid of trim data around each point model to accurately

Generally, the stitched model scheduling parameter vector can include additional state-elements (stitching elements, $\boldsymbol{X}$), such as y-body axis velocity V in the case of rotorcraft applications,[2] and exogenous-elements (scheduling parameters, $\delta\boldsymbol{X}$), such as flap deflection δ_f in the case of fixed-wing applications or nacelle angle in the case of tilt-rotor applications.[8] When state-space matrices and trim data are available at multiple altitudes, then altitude may be be included as a scheduling parameter.

2) The second distinction of the stitched model is that when state-space matrices and trim data are only available at a single altitude, the stitched model can apply air density ratio scaling. This allows the stitched model to account for variations in trim and dynamics with altitude, without explicitly including altitude in the schedule parameter vector. This was the case for the LJ-25 application presented herein, where the model is stitched with x-body axis velocity state U and scheduled with flap deflection δ_f, only:

$$\begin{bmatrix} U \\ \delta_f \end{bmatrix}^T \quad (15)$$

Therefore, for the LJ-25 application, the state trim values ($\boldsymbol{X}_0$ in Equation 3) and control input trim values ($\boldsymbol{U}_0$ in Equation 3) are implemented as lookup tables with respect to U and δ_f.

Note that a limitation of air density ratio scaling is in preserving Mach effects with altitude, since it does not capture the changing Mach number for a given airspeed with changing altitude. Therefore, when Mach effects are important, it is advisable to include altitude as a scheduling parameter by having point models at multiple altitudes.

3) The third distinction of the stitched model is the recognition that the general state-space form of Equation 3 describes aircraft-specific forces and moments, which can be broken up into their respective aerodynamic, gravity, and Coriolis components:

$$\begin{aligned}\boldsymbol{X} = {} & \boldsymbol{A}_{aero}(\ )\,\boldsymbol{X} \quad \boldsymbol{X}_0(\ ) + \boldsymbol{A}_{grav}(\ )\,\boldsymbol{X} \quad \boldsymbol{X}_0(\ ) \\ & + \boldsymbol{A}_{Cor}(\ )\,\boldsymbol{X} \quad \boldsymbol{X}_0(\ ) + \boldsymbol{B}_{aero}(\ )\,\boldsymbol{U} \quad \boldsymbol{U}_0(\ )\end{aligned} \quad (16)$$

In the stitched model, only the aerodynamic components ($\boldsymbol{A}_{aero}$ and $\boldsymbol{B}_{aero}$ in Equation 16) are implemented as lookup tables with respect to . The gravity component and Coriolis terms ($\boldsymbol{A}_{grav}$ and $\boldsymbol{A}_{Cor}$ in Equation 16) are removed from the linear point models and included instead in their nonlinear form through the full nonlinear equations of motion implemented in the stitched model.

4) The fourth distinction of the stitched model is its ability to scale the forces and moments for changes in mass, moments of inertia, and CG location through the equations of motion, thus allowing for simulation of changes in those parameters without explicitly including them as scheduling parameters. This is an important aspect of the stitched model for use with flight data, which will be discussed further in Section II.C.3.

5) The final distinction of the stitched model is the ability to simulate takeoff and landing through the inclusion of simple landing gear and spoilers models, an engine out condition, and different levels of wind and

turbulence. The resulting model is accurate for typical aircraft flight dynamics for the entire maneuvering flight regime, except for extreme conditions (e.g., stall or spin).

A block diagram schematic of the stitched model is shown in Figure 1 (duplicated from Ref. 3). Note that in this schematic, = U, and the model is only stitched with x-body axis velocity U. To summarize, model stitching is accomplished by implementing lookup tables of the aircraft state trim values, control input trim values, and stability and control derivatives based on point models and trim data. Trim states and controls are used to determine perturbation states [$\boldsymbol{x} = \boldsymbol{X} \quad \boldsymbol{X}_0(U)$] and controls [$\boldsymbol{u} = \boldsymbol{U} \quad \boldsymbol{U}_0(U)$], which in turn are multiplied by the stability and control derivatives and mass matrix ($\boldsymbol{MA} \quad \boldsymbol{u}$ and $\boldsymbol{MB} \quad \boldsymbol{x}$) to determine perturbation aerodynamic and control forces and moments. Note that the stability and control derivatives are determined based on a low-pass filtered U_f, to ensure that the derivative values remain constant for short-term motion and retain the accurate dynamic response at the discrete point models. Trim values are determined based on instantaneous U. The aerodynamic trim forces and moments are then summed to the perturbation values to yield the total aerodynamic forces and moments acting on the aircraft in body axes. In addition, the linearized Coriolis terms (e.g., $W_0 q$, etc., due to formulating equations of

C. Development From Flight Data

The linear point models and trim data that go into a stitched model can come from several different sources, including trimming and linearizing high-fidelity nonlinear simulation models that cannot be run in real-time[2,9] or from flight data. One requirement for the linear point models and trim data is that they vary only with the scheduling parameter vector , meaning that variations due to other sources (e.g., loading configuration) should be minimized. This is easy to enforce when developing a stitched model from a nonlinear simulation model, for example. However, when developing a stitched model from flight data, it can be impracticable or even impossible to identify all models and collect all trim data at the same loading configuration. Therefore, when developing a stitched model from flight data, care must be taken in designing the flight test, and a pre-processing step is taken which uses the stitched model's capability to scale for changes in weight, CG, and inertia, to "*baseline*" all identified models to a common loading configuration. The following sections will summarize the workflow of creating a stitched model from flight data.

1. Design the Flight Test

The first step in developing a stitched model from flight data is to determine what maneuvers to fly and at what flight conditions. For the recommended frequency-domain identification approach[3] used herein, the primary set of flight data collected are frequency sweeps in each of the control axes at each of the identification flight conditions. Note that where sweeps are not practical (e.g., for identifying the thrust response) pulses, doublets, 3-2-1-1, or other maneuvers may be used. Equally important to the frequency sweep data are the longitudinal speed stability (LSS) data[10] that should be collected around each identification flight condition. These LSS data will have two important uses described later on. Next, steady-heading sideslip data[10] should be collected at each identification flight condition. Validation data in the form of pulses, doublets, or steps in

is the preferred method and the one used herein. This is a two step approach in which rst, frequency responses are extracted from the frequency sweep time history ight data. Then, state-space models are t to the frequency responses and veri ed in the time domain. These state-space models are the point models (sometimes referred to as \point ID models" when identi ed from ight data) used to build up the stability and control derivative lookup tables in the stitched model. An example identi cation of the longitudinal axis dynamic-337.9.997(of)h9972ointtdi-410.9043ti c33(dyn2oin)2s8(d1(del.)w0.9043ti cfor(dyn2oin)2338.0044ti9(LJ-25(dyn

A. Aircraft Description

The aircraft used in this study is the Calspan Variable Stability System (VSS) Learjet LJ-25D, shown in Figure 2. It is a twin turbojet-powered business jet which in its unmodified state can carry eight passengers. It has a maximum take-off weight (MTOW) of 15,000 lbs, a cruise speed of 464 KTAS, a maximum range of 1,535 nm, and a service ceiling of 45,000 ft.

The aircraft is instrumented with sensors to measure air data (, , V_{tot}, q, h, and outside air temperature), aircraft states (, , , p, q, r, n_x, n_y, and n_z), controls (pilot stick and pedal force $F_{lat,lon,ped}$ and positions $_{lat,lon,ped}$, surface deflections $_{a,e,r}$, engine fuel control, and derived engine thrust $_T$), GPS measurements, and INS (H-423 Ring Laser Gyro).

Figure 2. Calspan Variable Stability System Learjet LJ-25D.

B. Test Points

Table 1 lists the flight condition and maneuvers flown at each test point. The test points are plotted against the LJ-25 flight envelope in Figure 3. Note that the points cover only a small portion of the envelope, but produce sufficient data to develop a full-envelope stitched model of this aircraft. For this test, the majority of the data were collected at 15,000 ft. This is a relatively low altitude compared to the flight envelope (Figure 3), however, was selected because is it the primary altitude at which the USAF TPS operates the Learjet.

Model identification data consisted of piloted frequency sweeps in the longitudinal, lateral, and directional axes, thrust doublets, longitudinal speed stability data, and steady heading sideslip data flown at five conditions for model development (Points 1 through 5, Table 1) and two conditions for model validation (Points 7 and 8, Table 1). Piloted frequency sweeps were used in favor of automated frequency sweeps because of their richer frequency content and improved ability to keep the aircraft on trim condition.

Trim data were collected at airspeeds spanning the identification points (185{300 kts) at increments of approximately 20 kts in one trim shot maneuver (Point 6, Table 1). Additional validation data consisting of piloted doublets in the longitudinal, lateral, and directional axes were collected at Points 9 and 10, Table 1.

Note that Points 1 and 2 (Table 1, Figure 3) were repeated at the same flight condition (185 kts, 15,000 ft), but Point 1 is a powered approach configuration (gear down, flaps 20), while Point 2 is a clean configuration.

Table 1. Test Matrix of Flight Conditions and Maneuvers Flown

Point	Speed [KIAS]	Altitude [ft]	Gear/ Flaps	Trim Shot	Piloted Sweeps[a]	Doublets[b]	Speed Stability	Steady Sideslips
Model Development Data								
1	185	15000	DN/20	-	X	X	X	X
2	185	15000	UP/UP	-	X	X	X	X
3	220	15000	UP/UP	-	X	X	X	X
4	250	15000	UP/UP	-	X	X	X	X
5	300	15000	UP/UP	-	X	X	X	X
6	185{300	15000	UP/UP	X	-	-	-	-
Model Validation Data								
7	250	15000	UP/UP	-	X	X	X	X
8	275	15000	UP/UP	-	X	X	X	X
9	140	10000	DN/20	-	-	X	-	-
10	135	6000	DN/20	-	-	X	-	-

[a] Frequency sweeps in pitch, roll, and yaw
[b] Doublets in pitch, roll, yaw, and throttle

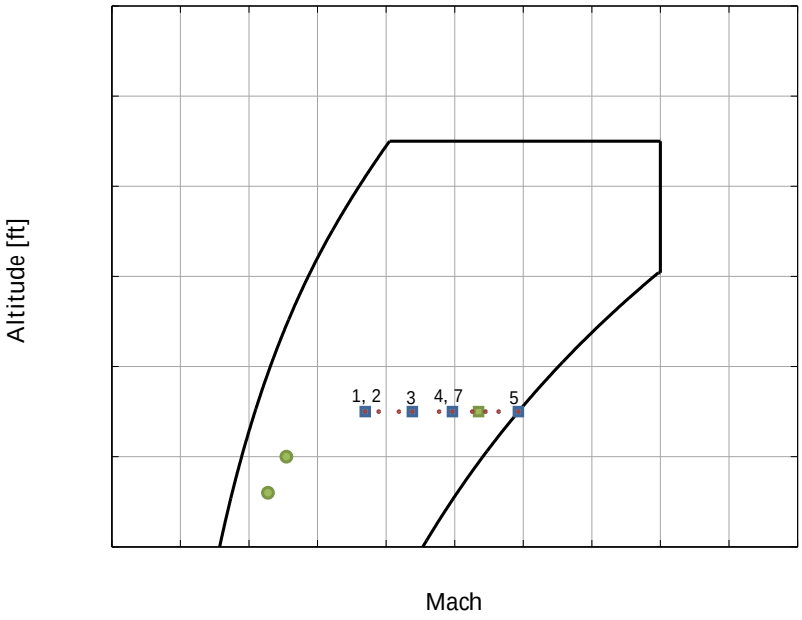

Figure 3. Learjet-25 ight envelope with ight test points.

IV. Point Model Identi cation

Longitudinal and lateral/directional state-space models were identi ed at seven of the test points | Points 1, 2, 3, 4, 5, 7, and 8 (Table 1, Figure 3). As mentioned in Section III.B, ve of these models were used to develop the stitched model, while the remaining two were only used for validation. Frequency domain identi cation was done in two steps using the CIFER® software tool.[3] First, frequency responses of the aircraft outputs were extracted from the frequency sweep ight data. Next, state-space models were t to the frequency response data. The following sections will provide the forms of the state-space models used, and show examplethetheeepvthe

A. Identification Model Form

The identified longitudinal and lateral/directional models are represented in state-space form:

$$\begin{aligned} \dot{\boldsymbol{x}} &= \boldsymbol{Ax} + \boldsymbol{Bu} \\ \boldsymbol{y} &= \boldsymbol{Cx} + \boldsymbol{Du} \end{aligned} \tag{19}$$

The models are in body axes, and have the forms given in Equation 20 and Equation 21, respectively.

$$\begin{bmatrix} \dot{u} \\ \dot{w} \\ \dot{q} \\ \dot{\theta} \end{bmatrix} = \begin{bmatrix} X_u & X_w & X_q & W_0 & g\cos\theta_0 \\ Z_u & Z_w & Z_q + U_0 & g\sin\theta_0 & \\ M_u & M_w & M_q & 0 & \\ 0 & 0 & 1 & 0 & \end{bmatrix} \begin{bmatrix} u \\ w \\ q \\ \theta \end{bmatrix} + \begin{bmatrix} X_{\delta_e} & X_{\delta_T} \\ Z_{\delta_e} & Z_{\delta_T} \\ M_{\delta_e} & M_{\delta_T} \\ 0 & 0 \end{bmatrix} \begin{bmatrix} \delta_e \\ \delta_T \end{bmatrix}$$

$$\begin{bmatrix} q \\ a_x \\ a_z \\ \dot{u} \\ \dot{w} \end{bmatrix} = \begin{bmatrix} 0 & 0 & 1 & 0 & \\ 0 & 1/U_0 & 0 & 0 & \\ X_u & X_w & X_q & 0 & \\ Z_u & Z_w & Z_q & 0 & \\ X_u & X_w & X_q & W_0 & g\cos\theta_0 \\ Z_u & Z_w & Z_q + U_0 & g\sin\theta_0 & \end{bmatrix} \begin{bmatrix} u \\ w \\ q \\ \theta \end{bmatrix} + \begin{bmatrix} 0 & 0 \\ 0 & 0 \\ X_{\delta_e} & X_{\delta_T} \\ Z_{\delta_e} & Z_{\delta_T} \\ X_{\delta_e} & X_{\delta_T} \\ Z_{\delta_e} & Z_{\delta_T} \end{bmatrix} \begin{bmatrix} \delta_e \\ \delta_T \end{bmatrix}$$

(*! !*



Figure 7. Longitudinal acceleration frequency response (250 kts, 15,000 ft, light weight con guration).



Figure 8. Vertical acceleration frequency response (250 kts, 15,000 ft, light weight con guration).

Figure 9. Derivative of x-axis body velocity frequency response (250 kts, 15,000 ft, light weight con guration).



Figure 10. Derivative of z-axis body velocity frequency response (250 kts, 15,000 ft, light weight con guration).

3. *Longitudinal Speed Stability Data*

In addition to the frequency sweep data gathered for model identi cation and doublet data gathered for model validation, longitudinal speed stability (LSS) data were gathered using the stabilized point technique.[12] The aircraft was trimmed around the identi cation point ight condition (250 kts, 15,000 ft in this case), throttle position was held constant, and airspeed was varied by climbing and descending. Airspeed was stabilized at three points above and three points below the trim condition (approximately 10 kts apart).

Figure 11 shows the full maneuver time history. Highlighted in red on the time history data are sections where the airspeed was stabilized, and the aircraft was in trim. Trim pitch attitude , z-body axis velocity $W = V_{tot} \sin$, elevator de ection $_e$, and estimated thrust $_T$ were averaged over each of the highlight sections and then plotted against x-body axis velocity $U = V_{tot} \cos$ to determine the trim gradients (as shown in Figure 12). These trim gradients were used to determine and x the u-stability derivatives (i.e., X_u, Z_u, and M_u) in the state-space model identi cation. This is done by recognizing that in trim $\dot{u} = 0$. Then, the state-space equations can be used to solve for the u-stability derivatives as a function of the other derivatives and the trim gradients, as is shown here for the X_u derivative:[3]

$$\dot{u} = X_u \quad u + X_w \quad w + (X_q \quad W_0) \quad q \quad g\cos \quad _0 \quad + X_{\quad e} \quad _e \tag{25}$$

$$X_u = X_w \frac{w}{u} + g\cos \quad _0 \frac{}{u} \quad X_{\quad e} \frac{_e}{u} \tag{26}$$

Note that the $X_{\quad T} \quad _T$ term is eliminated from Equation 25, because the LSS data is taken at constant throttle, and therefore $_T$ is assumed to be 0 (which is seen to nearly be the case in the bottom plot in Figure 11).

For the data presented in Figure 12, X_u is calculated to be (Equation 26):

$$\begin{aligned} X_u &= (0{:}0857)(\ 0{:}0934) + (32{:}146)(\ 0{:}000483) \quad (0{:}0727)(0{:}0127) \\ &= 0{:}0080 \quad 0{:}0155 \quad 0{:}000923 \\ &= 0{:}0084 \end{aligned} \tag{27}$$

with the main contributions coming from the $(g\cos \quad _0)(\quad = u)$ and $(X_w)(\ w = u)$ terms.

This process of determining and xing the u-stability derivatives is an iterative one, as it requires knowing the values of the other derivatives rst. That, in turn, requires identifying the state-space model before xing the u-stability derivatives. Once the u-stability derivatives are xed, the remaining derivatives are re-identi ed. Experience indicates that the values change very little, due to the frequency separation between the phugoid and short-period modes, and that additional iterations of this process are not needed.

As described in Section II.C.2 and Ref. 3, this method of xing the u-stability derivatives is preferred to freeing them in the state-space identi cation process since there is typically no frequency responses data at frequencies low enough to capture the phugoid dynamics. Therefore, freeing the u-stability derivatives would result in large insensitivity values for those derivatives. This also ensures that the speed derivatives will be consistent with the stitched model implementation. For example, X_u from Equation 26 and $X_{u_{qLPV}}$ from Equation 12 will be equal if the trim and control gradients used to determine X_u are the same as those used in the stitched model. This will be shown in Section VI.



Figure 11. Longitudinal speed stability maneuver time history (250 kts, 15,000 ft, light weight con guration).

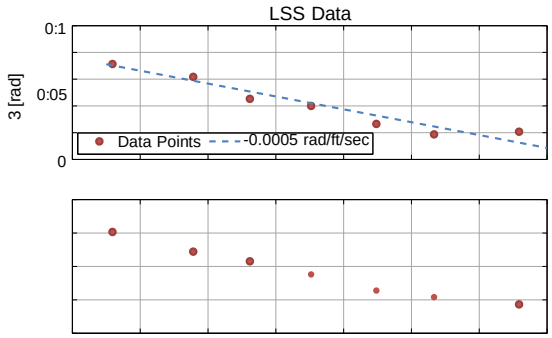

Figure 12. Trim gradients extracted from longitudinal speed stability maneuver time history (250 kts, 15,000 ft, light weight con guration).

4. State-Space Model Identification

The state-space model form given in Equation 20 was fit to the frequency responses shown in Figures 5 through 10 using the DERIVID tool in CIFER®.[3] The identification results are shown in Figures 13 through 18. The individual and average fit cost values are given in Table 2. The costs are calculated as a weighted sum of the magnitude and phase errors between the frequency responses and the model responses.[3] The figures show an excellent model fit, which is confirmed by the low individual and average fit costs given in Table 2 (costs of $J < 50$ indicate near perfect agreement[3]).

The identified parameter values as well as their insensitivity and Cramer-Rao bounds are given in Table 3. All identified parameters are *known to good accuracy* and not correlated with any other parameters as indicated by their low insensitivity ($\bar{I}$ 10%[3]) and Cramer-Rao bound ($\overline{CR}$ 20%[3]) values.

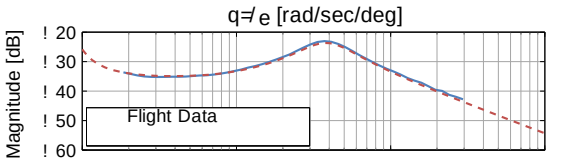



Figure 13. Pitch rate model fit (250 kts, 15,000 ft, light weight configuration).

Figure 14. Angle of attack model fit (250 kts, 15,000 ft, light weight configuration).

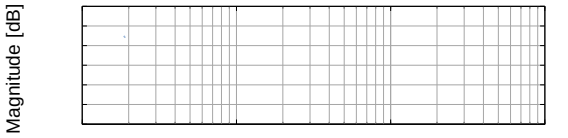



Figure 15. Longitudinal acceleration model fit (250 kts, 15,000 ft, light weight configuration).

Figure 16. Vertical acceleration model fit (250 kts, 15,000 ft, light weight configuration).



Figure 17. Derivative of x-axis body velocity model fit (250 kts, 15,000 ft, light weight configuration).



Figure 18. Derivative of z-axis body velocity model fit (250 kts, 15,000 ft, light weight configuration).

Table 2. State-Space Model Identification Fit Costs (250 kts, 15,000 ft, light weight configuration)

Response	Cost (J)
$= _e$	1.327
$q = _e$	5.145
$a_x = _e$	9.048
$a_z = _e$	1.492
$\underline{u} = _e$	25.11
$\underline{w} = _e$	14.07
J_{ave}	9.366

Table 3. State-Space Model Identification Pa-

The model captures the dynamics of the Learjet very well, which is shown by the excellent agreement of the ight and model data in the gures, as well as by the low RMS t error cost (J_{RMS} = 0:47 for the maneuver shown). Values of J_{RMS} 1:0 re ect a good level of accuracy.[3]

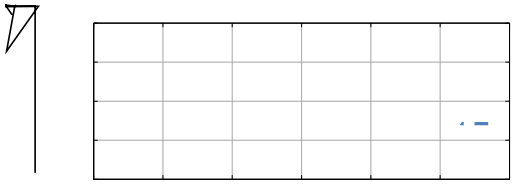

Figure 19. Time domain veri cation results (250 kts, 15,000 ft, light weight con guration).

Once the process laid out in Sections IV.B.1 to IV.B.5 was completed for the other ight conditions, Step 2 in Section II.C was completed.

V. Model Scaling

After individual point models at each ight condition were identi ed, the next step was to scale or \baseline" the models to a common loading con guration (Section II.C.3). Recall that this is a necessary step since the stitched model requires all models to be at the same loading con guration. This scaling technique is demonstrated here for the 250 kts ight condition, at which identi cation was done at two loading con gurations, described in Table 4.

First, example identi cation results will be given for the two loading con gurations at the 250 kts, 15,000 ft ight condition:

Con guration 1: Point 4, 250 kts, 15,000 ft, empty tip tanks, light weight, forward X_{cg}
Con guration 2: Point 7, 250 kts, 15,000 ft, full tip tanks, heavy weight, aft X_{cg}

Then, the identi cation results will be used to determine the moments of inertia of the two con gurations, which are needed to scale the stitched model. Finally, using the stitched model's scaling capability, the Con guration 1 model will be scaled to the loading con guration of Con guration 2 and the results will be compared against the Con guration 2 ight identi ed model.

Table 4. Loading Con gurations (250 kts, 15,000 ft)

	Con guration 1 Light/Fwd	Con guration 2 Heavy/Aft
Tip Tank Fuel [lbs]	0	1919.4
Total Fuel [lbs]	2328.6	4580.3
Total Weight [lbs]	12,026.6	14,281.3
X_{cg}[a]		

Figure 22. Roll rate response to aileron input com-

Table 6. Longitudinal S&C Derivatives Comparison (250 kts, 15,000 ft)

Param.	Con g. 1	Con g. 2
	A-matrix	
X_u	{0.009725	{0.009896
X_w	0.08642	0.08382
X_q	0	0
Z_u	{0.1119	{0.08969
Z_w	{1.432	{1.142
Z_q	0	0
M_u	0.0004093	0.0008353
M_w	{0.02352	{0.01783
M_q	{1.65	{1.554
	B-matrix	
X_e	0.07084	0.07811
X_T	0.002289	0.001944
Z_e	{1.244	{0.9845
Z_T	{0.001053	{0.0009109
M_e	{0.1919	{0.1856
M_T	{3.826e{05	{3.444e{05

Table 7. Lateral/Directional S&C Derivatives Comparison (250 kts, 15,000 ft)

Param.	Con g. 1	Con g. 2
	A-matrix	
Y_v	{0.1698	{0.1454
Y_p	0.8673	0.527
Y_r	0	0
L_v	{0.01918	{0.009209
L_p	{2.278	{1.035
L_r	0.8487	0.7406
N_v	0.005268	0.004034
N_p	{0.2258	{0.1004
N_r	{0.2719	{0.1859
	B-matrix	
Y_a	{0.0132	{0.02062
Y_r	0.3073	0.2368
L_a	{0.1623	{0.07185
L_r	0.03301	0.0173
N_a	{0.01127	{0.003775
N_r	{0.03732	{0.02688

B. Moments of Inertia Determination

Moment of inertia estimates were determined from the models of the two con gurations. If we assume a constant pitch moment of inertia I_{yy} between the two con gurations (as suggested by the similar magnitudes of the high-frequency asymptotes of the pitch rate frequency responses in Figure 20), we can use the ratio of the M_w stability derivative (Table 6) and X_{cg} (Table 4) di erence between the two con gurations to calculate an average I_{yy}.[3] Recognizing that:[13]

$$M_w = \frac{SUc}{2I_{yy}} C_M \tag{28}$$

and:

$$C_M = C_L \frac{X_{cg} - X_{np}}{c} \tag{29}$$

the location of the neutral point X_{np} can be determined by solving:

$$\frac{M_{w_2}}{M_{w_1}} = 0{:}758 = \frac{X_{cg_2} - X_{np}}{X_{cg_1} - X_{np}} \tag{30}$$

The neutral point is calculated to be X_{np} = 2:53 ft (or X_{np} = 35:9% MAC). The remaining value needed in order to determine I_{yy} is C_L , which can be calculated based on:[13]

$$C_L = \frac{Z_w}{SU=2m} C_D \tag{31}$$

Ignoring the contribution of C_D to C_L , an average C_L = 5:64 is calculated based on the average Z_w value (Table 6). Finally,

Combining Equations 35 and 38 and Equations 36 and 39, we can solve for the roll and yaw moments of inertia of both con gurations. The product of inertia I_{xz} was determined through trial and error of the model scaling process by comparing o -axis frequency responses (e.g., $= _a$, $p= _r$) where its e ects were most noticeable. The values of the moments of inertia for the two con gurations are provided in Table 8. Note that the actual values of I_{yy} for the two con gurations were slightly modi ed based on the model scaling process, though the average of the I_{yy} values in Table 8 matches very closely to that calculated in Equation 32.

Table 8. Calculated Moments of Inertia Based on Identi ed Derivatives

Moment of Inertia [slug-ft^2]	Con g. 1 Light/Fwd	Con g. 2 Heavy/Aft
I_{xx}	11,985	26,446
I_{yy}	26,765	27,932
I_{zz}	41,395	56,302
I_{xz}	1949.8	1341.8

C. Baselining Results

To test the ability of the stitched model to scale one loading con guration to another, the stitched model was populated with the 250 kts light-weight/forward-CG model (Con guration 1) and associated longitudinal speed stability trim data. The stitched model was then scaled to the 250 kts heavy-weight/aft-CG con guration (Con guration 2), by setting m_{sim} and I_{sim} in Figure 1 to the heavy-weight/aft-CG con guration values.

Figures 24 through 27 show comparisons of the primary on-axis frequency responses of the ight identi ed 250 kts heavy-weight/aft-CG model and the results of the scaled stitched model. In addition, Table 9 shows a comparison of the trim data from ight and from the scaled stitched model for the 250 kts heavy-weight/aft-CG con guration. An excellent agreement is seen in both the frequency responses (dynamic response) and trim data between the ight data and scaled stitched model. This gives con dence in the stitched model's ability to scale one loading con guration to another, which was subsequently used to scale all ight identi ed models to a single, common loading con guration.

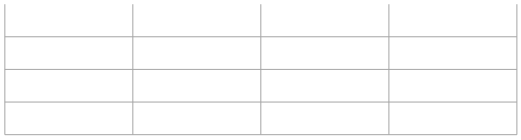

Figure 24. Pitch rate response to elevator input comparison between ight identi ed model and scaled stitched model (250 kts, 15,000 ft, heavy loading con guration).

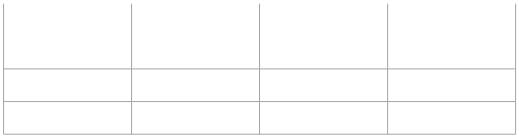

Figure 25. Roll rate response to aileron input comparison between ight identi ed model and scaled stitched model (250 kts, 15,000 ft, heavy loading con guration).

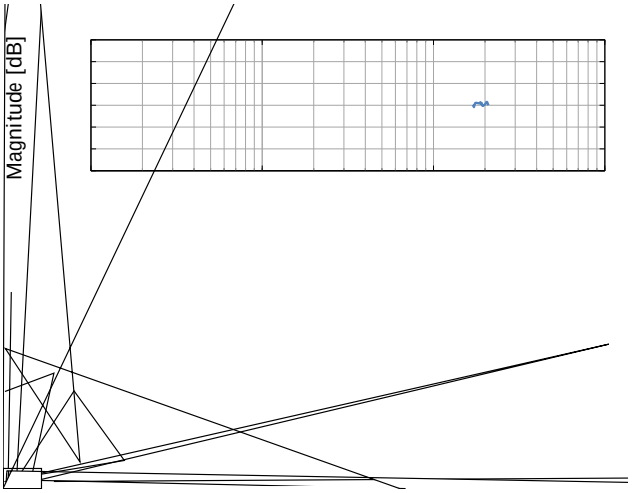

Figure 26. Roll rate response to aileron input comparison between ight identi ed model and scaled stitched model (250 kts, 15,000 ft, heavy loading con guration).

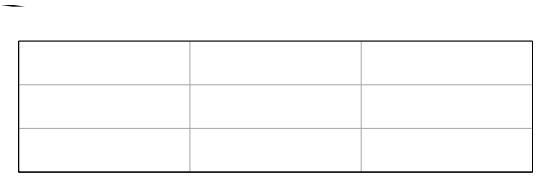

Figure 27. Sideslip response to rudder input comparison between ight identi ed model and scaled stitched model (250 kts, 15,000 ft, heavy loading con guration).

Table 9. Trim Comparison (250 kts, 15,000 ft, heavy loading con guration)

	Flight ID	Stitched Model
$_0$ [deg]	2.883	2.787
$_0$ [deg]	2.883	2.787
$_{e_0}$ [deg]	3.968	-3.779
$_{s_0}$ [deg]	0	0
T_0 [lbs]	14,559	14,376

VI. Repurposing Longitudinal Speed Stability Data

Recall from Section II.A that it is important to have a ne grid of trim data about each individual point model to accurately capture the e ects of the speed stability derivatives. Therefore, in addition to scaling each identi ed point model to a common loading con guration, the stitched model was also trimmed at airspeeds of 20, 10, +10, and ab9r8r[99462.008u/T1_5 4.981 Tfr28.005f 2f7(in)-36928.005f9(ind94(sp)-28hsp)1.43c9.963 5ee

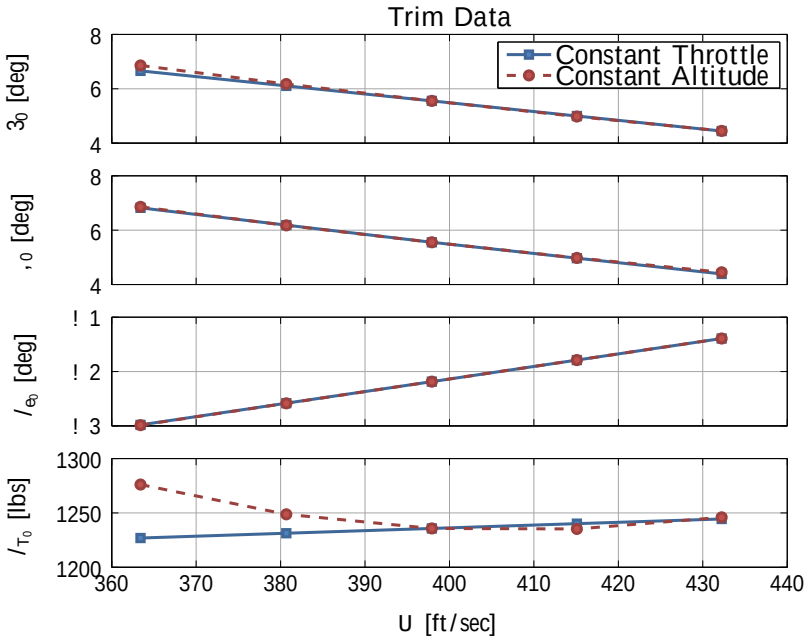
Trim Data
Constant Throttle
Constant Altitude
8
6
4
3₀ [deg]
8
6
4
, ₀ [deg]
! 1
! 2
! 3
/ e₀ [deg]
1300
1250
1200
/ T₀ [lbs]
360
370
380
390
400
410
420
430
440
U [ft/sec]

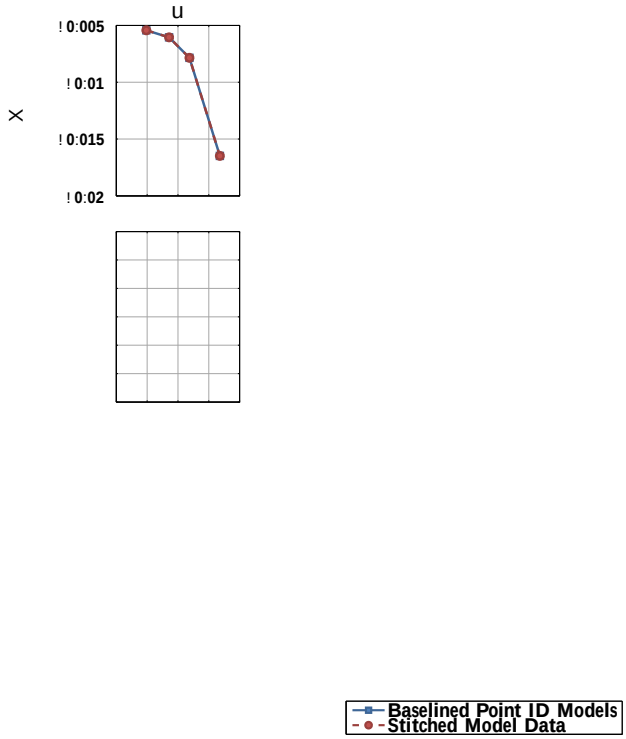

Figure 29. Longitudinal axis stability and control derivatives as a function of airspeed (15,000 ft).

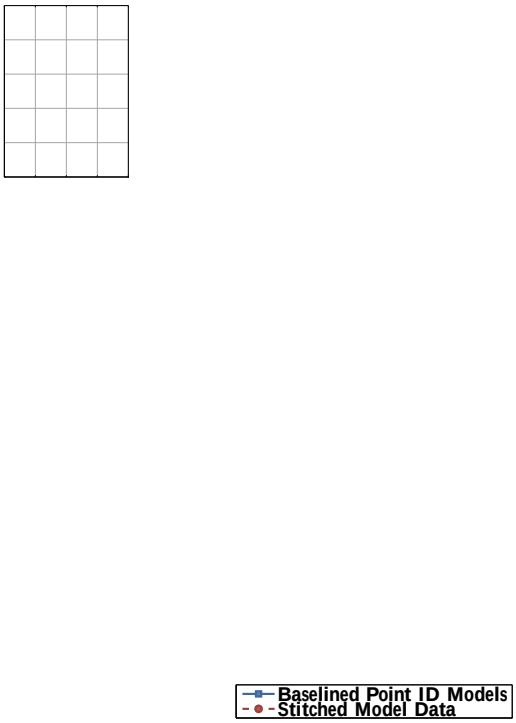

Figure 30. Lateral/directional axis stability and control derivatives as a function of airspeed (15,000 ft).

B. Trim Data

Once the LSS data set around each point model was repurposed into a constant altitude, varying thrust trim shot data set, and baselined to the stitched model loading con guration (Section VI), the four trim shot data sets were combined. Then, least squares ts were made to each trim parameter based on its expected variations with airspeed, in order to both be able to generate a ner grid of trim data and to be able to

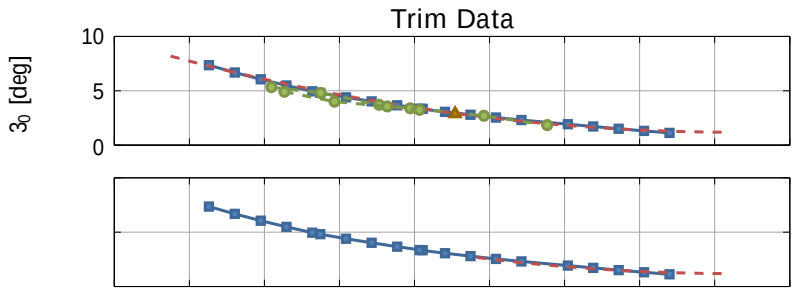

Figure 32. Trim data as a function of airspeed (15,000 ft).

C. E ects of Flaps

The stitched model data presented thus far in Sections VII.A and VII.B was for aps up ($_f = 0$). Recall from Equation 15, that the Learjet stitched model is stitched with x-body axis velocity U and scheduled with ap de ection $_f$. The stitched model requires a rectangular grid of data (i.e., there must be a corresponding aps down model at each aps up model U, even if some of these models are outside the aps down ight envelope).

To populate the stitched model lookup tables with additional data for the aps down con guration, the point model and LSS data for Point 1 (Table 1, Figure 3) were used. Scale factors were determined between the Point 1 and Point 2 identi ed point models (both at 185 kts, 15,000 ft but varying ap de ections). In addition, trim values and trim gradient scale factors were also determined. These stability and control derivatives, trim, and trim gradient scale factors were then used to generate $_f = 20$ data from the $_f = 0$ models and trim data to populate the stitched model.

VIII. Validation of Final Stitched Model

This section covers both time- and frequency-domain validation of the nal stitched model using ight data that were not used for identi cation. The validation was done at several di erent ight conditions, some matching the ight conditions of the point models in the stitched model and some not. Furthermore, the validation ight data were in general recorded at loading (fuel, weight, CG) conditions di erent than the stitched model. Therefore, the results presented in this section will validate the ability of the stitched model to trim at and simulate conditions that require interpolation and extrapolation.

A combination of pilot stick inputs and Programmed Test Inputs (PTI) were used for the time-domain validation. The direct pilot stick to aircraft aerosurfaces connection was included in the stitched model to be able to use the recorded pilot inputs and PTIs from ight to simulate the model.

A. Doublets

Validation doublets were implemented through Programmed Test Inputs (PTI) in the VSS. To generate the stitched model results, the model was rst trimmed at the same ight condition and loading con guration as the ight data. Then, the recorded PTI and pilot inputs (i.e., stick, pedals, and throttles) were used as the inputs to simulate the stitched model.

Figure 33 shows a pitch axis doublet response at the 250 kts, 15,000 ft ight condition. The rst subplot shows the input force on the longitudinal stick F_{lon} from the PTI. The second subplot shows the resulting elevator de ection $_e$ from ight data and from the stitched model. The trim elevator de ection value (rst 5 sec of the plot) matches ight data, meaning the stitched model trim data is accurate. The elevator de ection during the doublet matches ight data as well, which validates the stick to elevator gain implemented in the model. The remaining subplots show the primary longitudinal aircraft responses (q, , n_z, and) as measured from ight and from the stitched model. Again, the rst 5 sec of the responses match well, demonstrating that the stitched model trimmed at the right aircraft states. Furthermore, the stitched model dynamic responses all match ight data very well, as indicated by the low RMS t error cost[3] J_{RMS} = 0:22 for the maneuver shown. From the small negative initial pitch rate q, sloping down initial pitch attitude , and initial normal acceleration n_z greater than 1 g, it can be seen that the aircraft was slightly out of trim in ight. This did not negatively impact the validation.

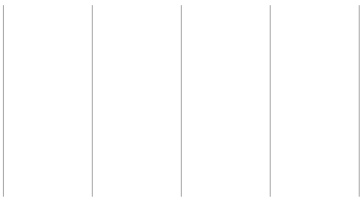

Figure 33. Pitch doublet response (250 kts, 15,000 ft).

Figure 34 shows a roll axis doublet response at the 250 kts, 15,000 ft ight condition. The rst subplot shows the input force on the lateral stick F_{lat}. The second subplot shows the resulting aileron de ection $_a$ from ight data and from the stitched model. The excellent match in aileron de ection validates the stick gain implemented in the stitched model. The remaining subplots show the primary lateral/directional aircraft responses (p, r, n_y, and) as measured from ight and from the stitched model. As with the pitch doublet response, there is an excellent match between the stitched model and the ight data, with J_{RMS} = 0:53, demonstrating the stitched model's accurate representation of the aircraft roll mode and lightly damped Dutch roll mode.

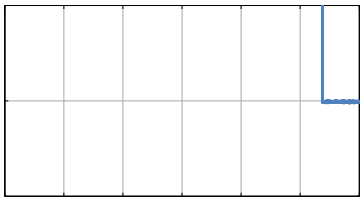

Figure 34. Roll doublet response (250 kts, 15,000 ft).

B. Elevator and Stick Force Maneuvering Stability

Elevator and stick force maneuvering stability were validated using a wind-up turn, or slowly varying g, maneuver.[10] As with the doublet data above, the stitched model results were generated by first trimming the stitched model at the same flight condition and loading configuration as the flight data, and then using the recorded pilot inputs (i.e., stick, pedals, and throttles) to simulate the stitched model. This is a very dynamic maneuver that includes banking, diving, and increasing load factor, and hence is an excellent way to validate the fidelity of the stitched model in multiple axes simultaneously.

Figure 35 shows the stick force F_{lon}, elevator deflection $_e$, and angle of attack plotted against normal acceleration from flight and from the stitched model. Note that autotrim was on during this maneuver, and so the horizontal stabilizer $_s$ moved to offload the elevator at about $n_z = 1$:

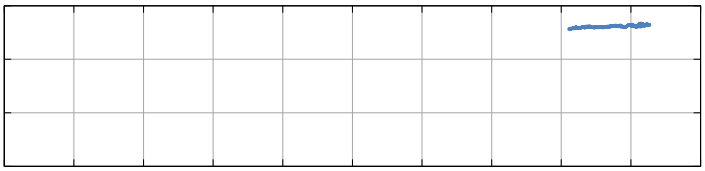

Figure 35. Wind-up turn (185 kts, 15,000 ft).

C. Roll Rate Per Aileron De ection

Roll rate per aileron de ection was assessed in ight using PTI step inputs of varying magnitudes (1/4, 1/2, and 3/4 of full stick input) in both directions. For each input, the resulting steady-state roll rate was recorded to generate the plots in Figure 36, for the 250 kts, 15,000 ft ight condition. The gure shows the results from ight and from simulating the stitched model with the PTI inputs from ight. There is an excellent agreement between the stitched model and ight data, with both having a value of stick force per roll rate of dF_{lat}/dp = 0:13 lbs/deg/sec.

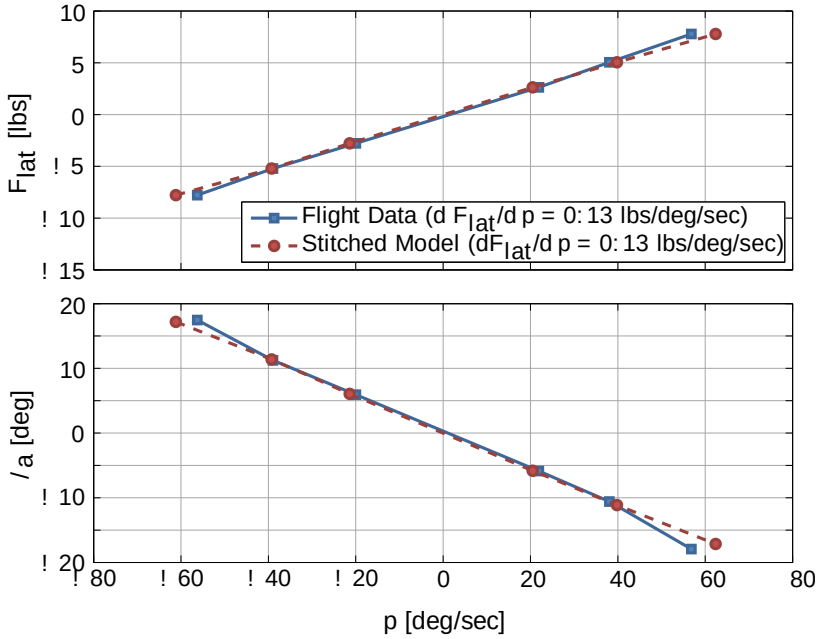

Figure 36. Roll rate per aileron de ection (250 kts, 15,000 ft).

D. Sideslip Per Rudder De ection

Sideslip per rudder de ection was assessed in ight using a piloted steady heading sideslip maneuver. The resulting sideslip angle , pedal force F_{ped}, and rudder de ection $_r$ were recorded to generate the plots in Figure 37. The gure shows the results from ight and from simulating the stitched model with the piloted inputs from ight. There is an excellent agreement between the stitched model and ight data, with both having values of pedal force per sideslip $dF_{ped}=d$ within 6%.

Figure 37. Steady heading sideslip (250 kts, 15,000 ft).

E. Frequency Responses

Figures 38 through 41 show frequency response comparisons from ight data and from the nal stitched model for the primary on-axis responses. Flight data were analyzed in CIFER® to generate frequency responses, while results from the stitched model were obtained by trimming and linearizing the stitched model at the appropriate ight condition and loading con guration. The results were generated at 275 kts, 15,000 ft (Point 8, Table 1), which is a ight condition that does not align with any of the point models in the stitched model. Therefore, these results test the stitched model's interpolation capabilities.

Figure 38 shows the normal load factor frequency response to elevator input ($n_z=$ $_e$) for both the stitched model and ight data. There is an excellent agreement over the broad frequency range of good coherence (0:6) $!$ = 0:2 to 8 rad/sec. Figure 39 shows the longitudinal load factor frequency response to thrust input ($n_x=$ $_T$) for both the stitched model and ight data. The ight data frequency response for thrust was generated from a thrust pulse, and not frequency sweeps, hence the frequency range of good coherence is smaller $!$ = 0:9 to 10 rad/sec. The stitched model is an excellent match to the ight data over this frequency range.

Figure 40 and 41 show the roll rate to aileron ($p=$ $_a$) and sideslip to rudder ($=$ $_r$) frequency responses, respectively. There is an excellent agreement between the stitched model and ight data for both of these lateral/directional responses.

Similar agreement between the stitched model and ight data was observed for the other aircraft responses. These results validate the ability of the stitched model to accurately simulate the aircraft dynamics at ight conditions not explicitly included in the stitched model data.

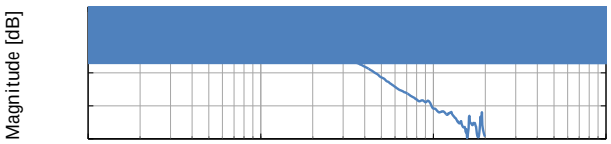

Figure 38. Normal acceleration response to elevator input (275 kts, 15,000 ft).

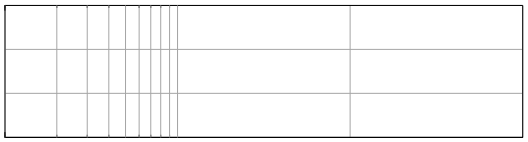

Figure 39. Longitudinal acceleration response to thrust input (275 kts, 15,000 ft).

Figure 40. Roll rate response to aileron input (275 kts, 15,000 ft).

Figure 41. Sideslip response to rudder input (275 kts, 15,000 ft).

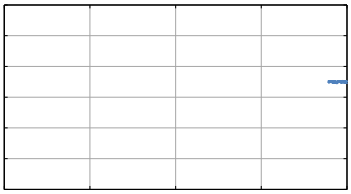

Figure 42.

Acknowledgments

The authors would like to thank Evan Thomas, Jason Kirkpatrick, Jay Kemper, and Ryan McMahon (Calspan Corporation) for their hard work on the ight tests and simulator integration.

References

[1] Zivan, L. and Tischler, M. B., \Development of a Full Flight Envelope Helicopter Simulation Using System Identi cation," Journal of the American Helicopter Society, Vol. 55, No. 022003, pp. 1-15, 2010.

[2] Tobias, E. L. and Tischler, M. B., \A Model Stitching Architecture for Continuous Full Flight-Envelope Simulation of Fixed-Wing Aircraft and Rotorcraft from Discrete-Point Linear Models," U.S. Army AMRDEC Special Report RDMR-AF-16-01, April 2016.

[3] Tischler, M. B. and Remple, R. K., Aircraft and Rotorcraft System Identi cation: Engineering Methods and Flight Test Examples Second Edition , AIAA, 2012.

[4] Berger, T., Tischler, M. B., Hagerott, S. G., Cotting, M. C., Gresham, J. L., George, J. E., Krogh, K. J., D'Argenio, A., and Howland, J. D., \Handling Qualities Flight Test Assessment of a Business Jet N_zU P- Fly-By-Wire Control System," AIAA Atmospheric Flight Mechanics, Grapevine, TX, January 2017.

[5] Kemper, J. and Cotting, M. C., \Simulator Design for Flying and Handling Qualities Instruction," AIAA Modeling and Simulation Technologies Conference, San Diego, CA, January 2016.

[6] Tobias, E. L., Tischler, M. B., Berger, T., and Hagerott, S. G., \Full Flight-Envelope Simulation and Piloted Fidelity Assessment of a Business Jet Using a Model Stitching Architecture," presented at the AIAA Modeling and Simulation Technologies Conference, Kissimmee, FL, January 2015.

[7] Marcos, A. and Balas, G. J., \Development of Linear-Parameter-Varying Models for Aircraft," AIAA Journal of Guidance, Control, and Dynamics, Vol. 27, No. 2., March-April 2004.

[8] Lawrence, B., Malpica, C. A., and Theodore, C. R., \The Development of A Large Civil Tiltrotor Simulation for Hover and Low-Speed Handling Qualities Investigations," presented at the 36th European Rotorcraft Forum, Paris, France, September 2010.

[9] Lawrence, B., Berger, T., Tischler, M. B., Elmore, J. amd Gallaher, A., Theodore, C. R., and Tobias, E. L., \Integrating Flight Dynamics and Control Analysis and Simulation in Rotorcraft Conceptual Design," presented at the American Helicopter Society 72nd Annual Forum, West Palm Beach, FL, May 2010.

[10] Kimberlin, R. D., Flight Testing of Fixed-Wing Aircraft , AIAA, 2003.

[11] Gresham, J. L., George, J. E., Krogh, K. J., D'Argenio, A., and Howland, J. D., \Limited Evaluation of Cessna Aircraft Company Control Law (Project Tacit CLEAR)," USAF TPS-TIM-15B-02, June 2016.

[12] Anon., \U.S. Naval Test Pilot School Flight Test Manual: Fixed Wing Stability And Control Theory and Flight Test Techniques," USNTPS-FTM-No. 103. Naval Air Warfare Center, Aircraft Division, Patuxent River, MD, January 1997.

[13] McRuer, D., Ashkenas, I., and Graham, D., Aircraft Dynamics and Automatic Control , Princeton University Press, 1990.